

A Cartoon Description of Linear Accelerators

Rob Kutschke

NML Controls Meeting

February 19, 2007

Caveat

- My background is detectors not accelerators.
- Many of you may know more than I do about some part or other. Please feel free to add comments and to correct any mistakes I have made.

A Few Numbers

- Operating frequency: $\nu = 1.3 \text{ GHz}$
- Wavelength: $\lambda = c/\nu = 23.1 \text{ cm}$
 - Feature sizes are typically small rational fractions of the wavelength: $\lambda, \lambda/2, \lambda/4 \dots$
- For electrons:
 - $E=100 \text{ MeV}, 1-v/c=12.E-6$
 - Difference of 12 microns over 1 m.
 - Bunch length is 300 microns.
 - So to a good approximation the electron speed is constant over long lengths of the linac.
 - Notable exception in first few meters.


RF Cavity Cutaway on 15th Floor



The RF Cavities are the heart of the ILC

Detail of the 15th Floor Cavity


Port

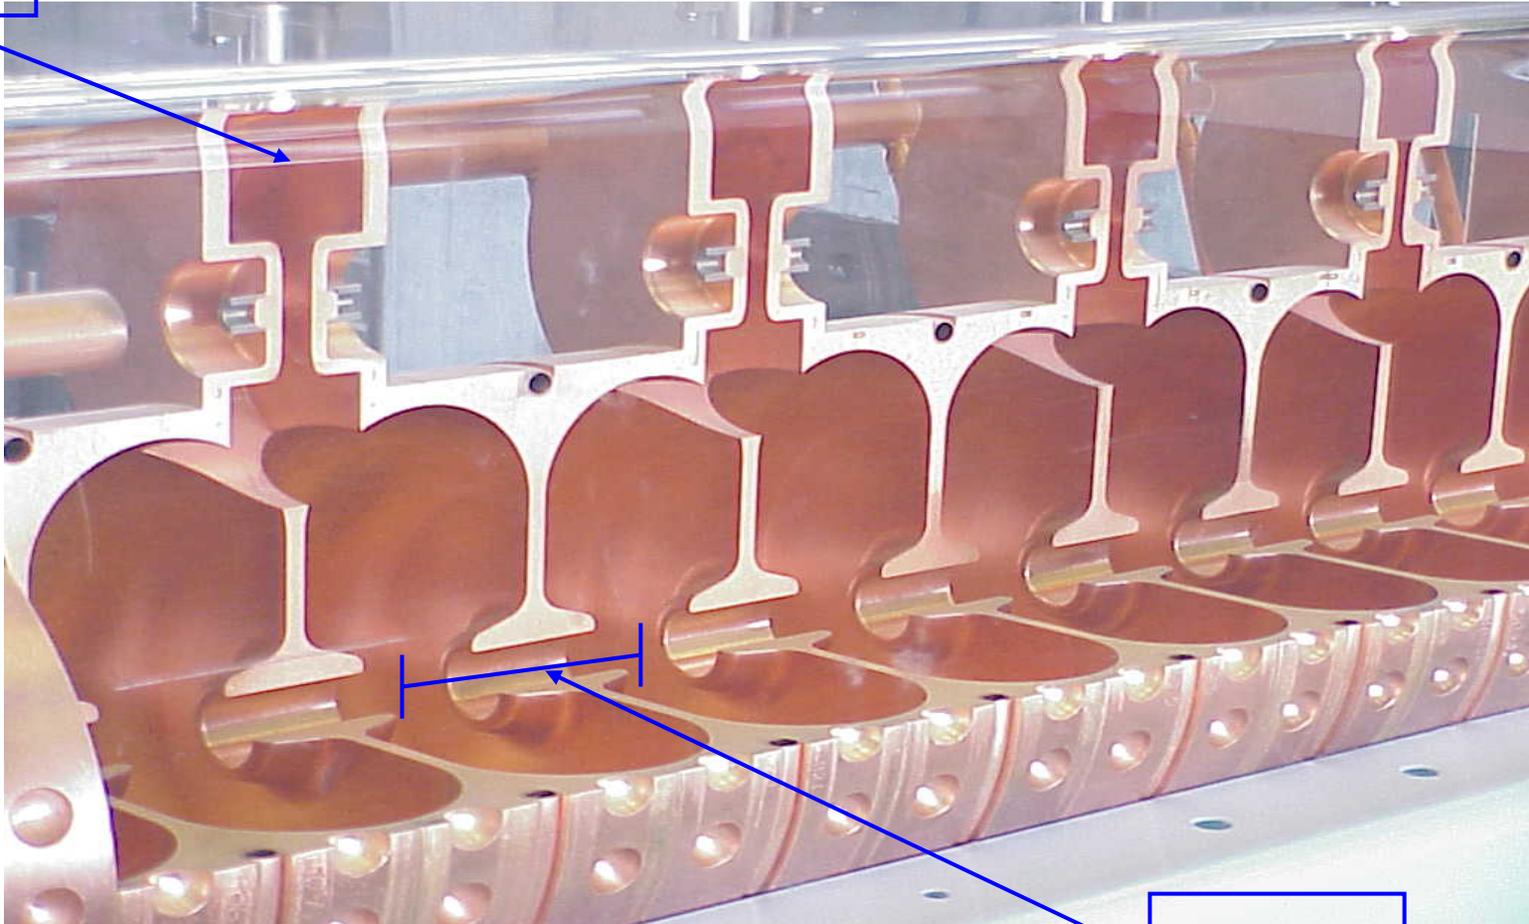

$\lambda/2$


- RF energy enters via ports
 - ILC has only one port per 9 cell cavity (?).
- Energy bounces around inside the cavity cells. Bouncing waves interfere with each other.
- Shape designed to get standing wave interference pattern with the property that the on axis electric field is:
 - Parallel to the axis.
 - Oscillates in strength (+ and -).
- Close to axis the transverse components are small.
- I forget what the field is far from axis.
- Q = quality factor of resonator.
- Q of ILC cavity needs to be 10^{10} . High Q implies:
 - Higher on axis field for a given input power at correct frequency.
 - Tighter demands on accuracy and stability of the input power.
 - Tight mechanical and material tolerances.
- Cavities can be tuned to respond to the correct frequency (within small tolerances).

Basic Idea for Acceleration

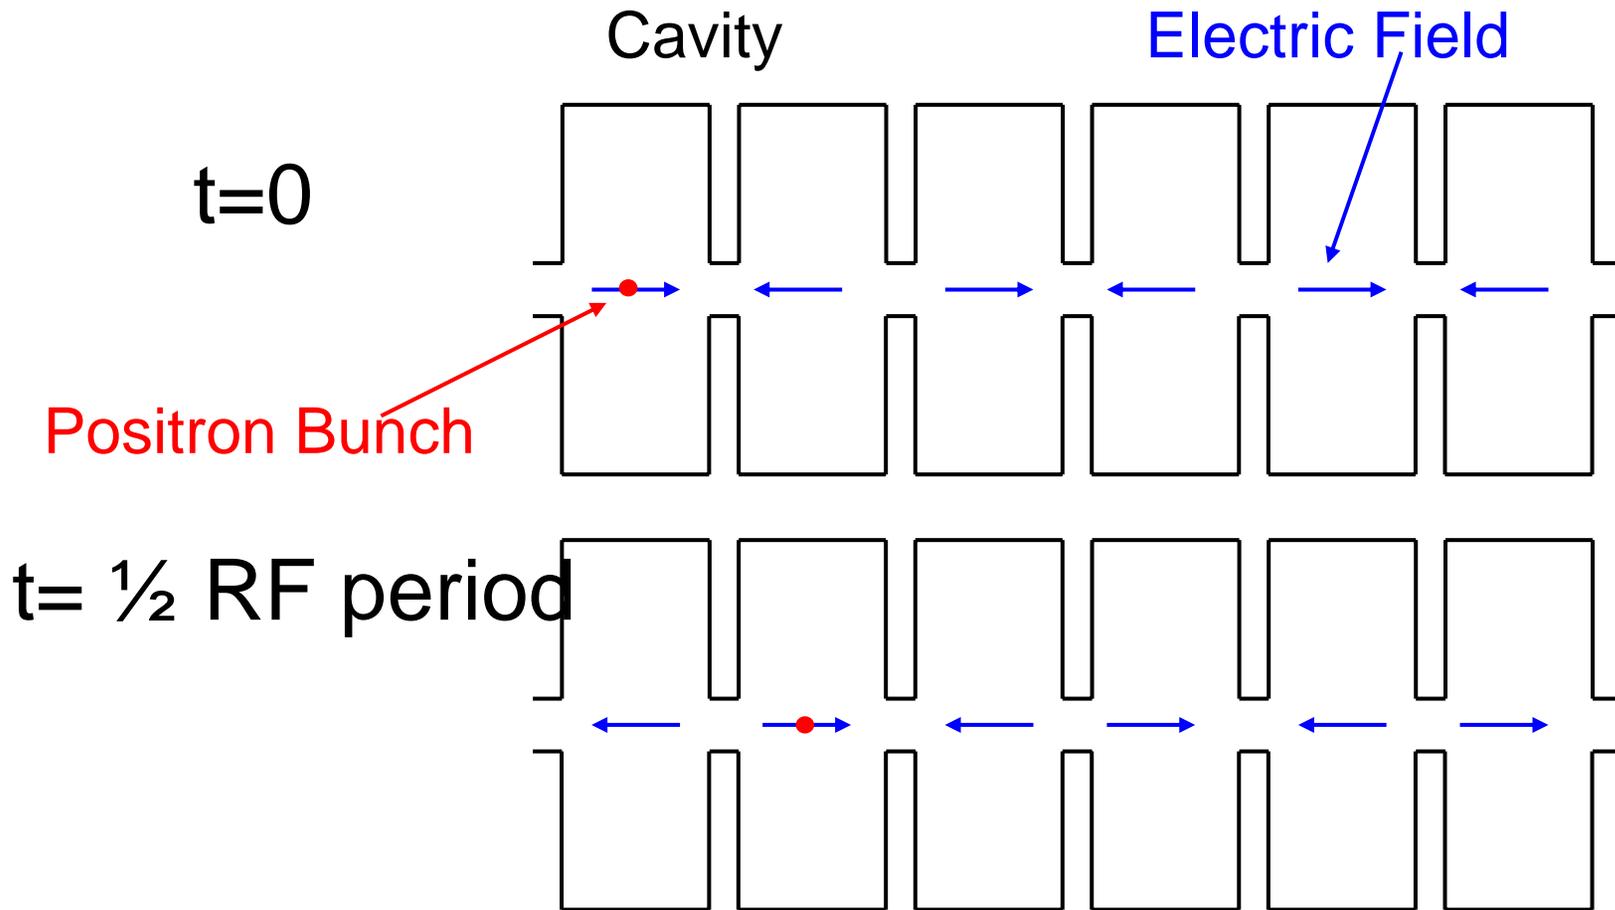

- Positrons accelerate in the direction of the electric field.
- Electrons accelerate in the direction opposite to the electric field.
- Node in the standing wave between cells.
- Detailed shape of cavity and choice of the RF frequency ensures that the electric field has the correct phase (timing) with respect to the arrival of each bunch.
- Electrons/positrons extract energy from the standing wave.

Snapshot of Electric Field Strength

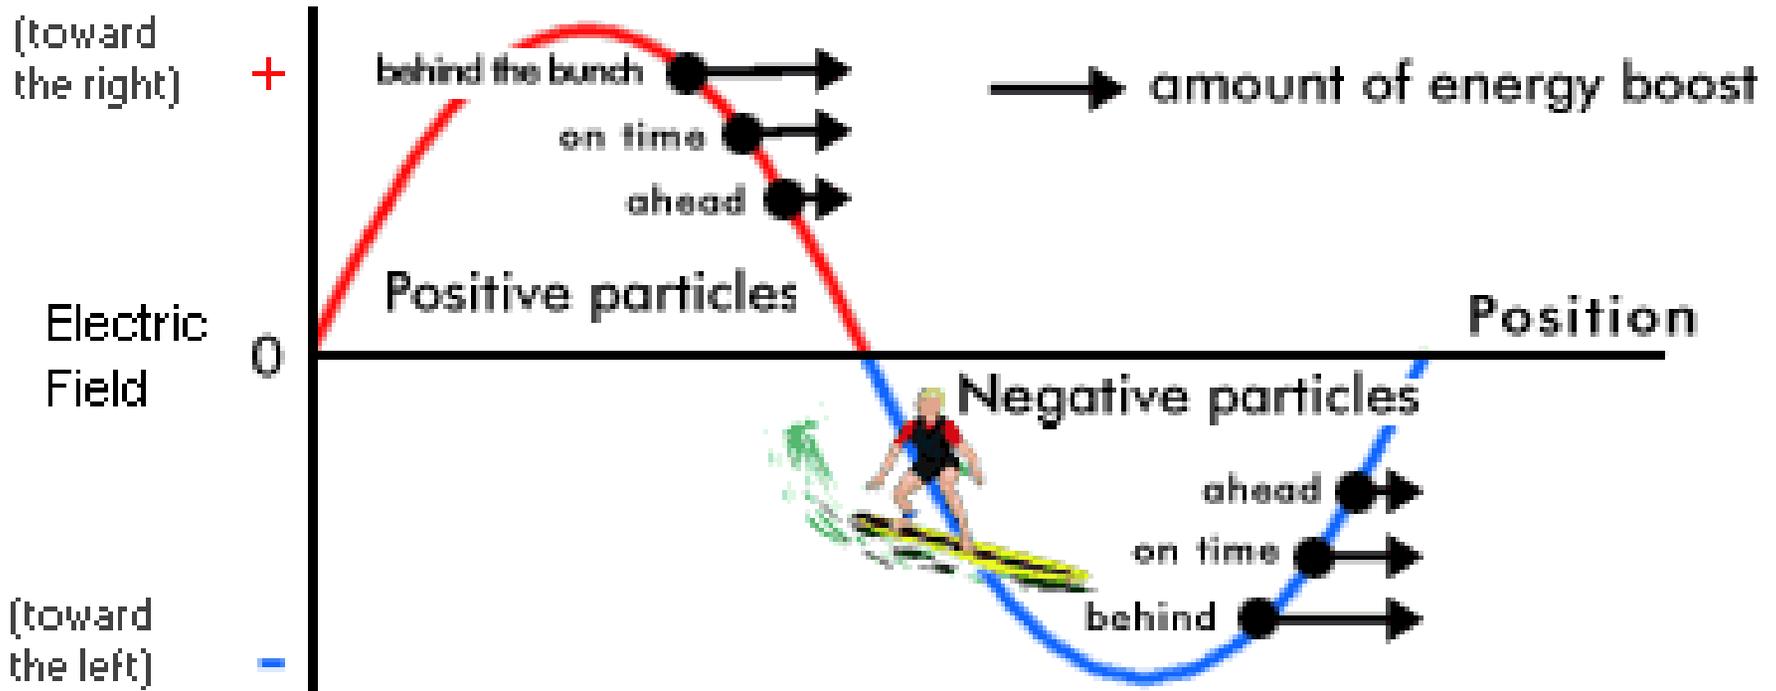

“Phase Focusing” keeps bunches bunched.

- Operate close to max field strength:
 - Gives maximum acceleration
- But not too close:
 - No phase focusing exactly at max.
 - Actually defocuses if bunch straddles max.
- High frequency, short bunch length and long accelerator length make it harder to precisely control the timing of the RF relative to the arrival of the bunch at every cell.
- Q increases with falling temperature
 - Cost optimum 2K.



- ILC 9 cell cavity in its vertical orientation.
- Only one input port per 9-cell cavity.

Why 9 Cells per Cavity?


- If too few cells/cavity the packing fraction is too small.
 - Need things like bellows between cavities to allow for thermal expansion.
 - Other reasons?
- If too many cells/cavity:
 - Production yield issues.
 - Peak accelerating field drops with number of cells (really another sort of yield issue).
 - Other reasons? Approximation of constant speed fails????

What Are the Other Parts For?

- Delivering power to RF cavities.
- Corrections for imperfections.
 - Includes focusing of off-axis particles.
- Feedback and monitoring.

Klystron

- A narrow band RF amplifier.
- Phase of output waveform controlled by a reference wave (from low level RF).
- Amplitude of output frequency governed by power delivered by the **RF Modulator** (think of it as a power supply for the klystron).
- More info:
 - <http://en.wikipedia.org/wiki/Klystron>
 - <http://www2.slac.stanford.edu/vvc/accelerator.html>

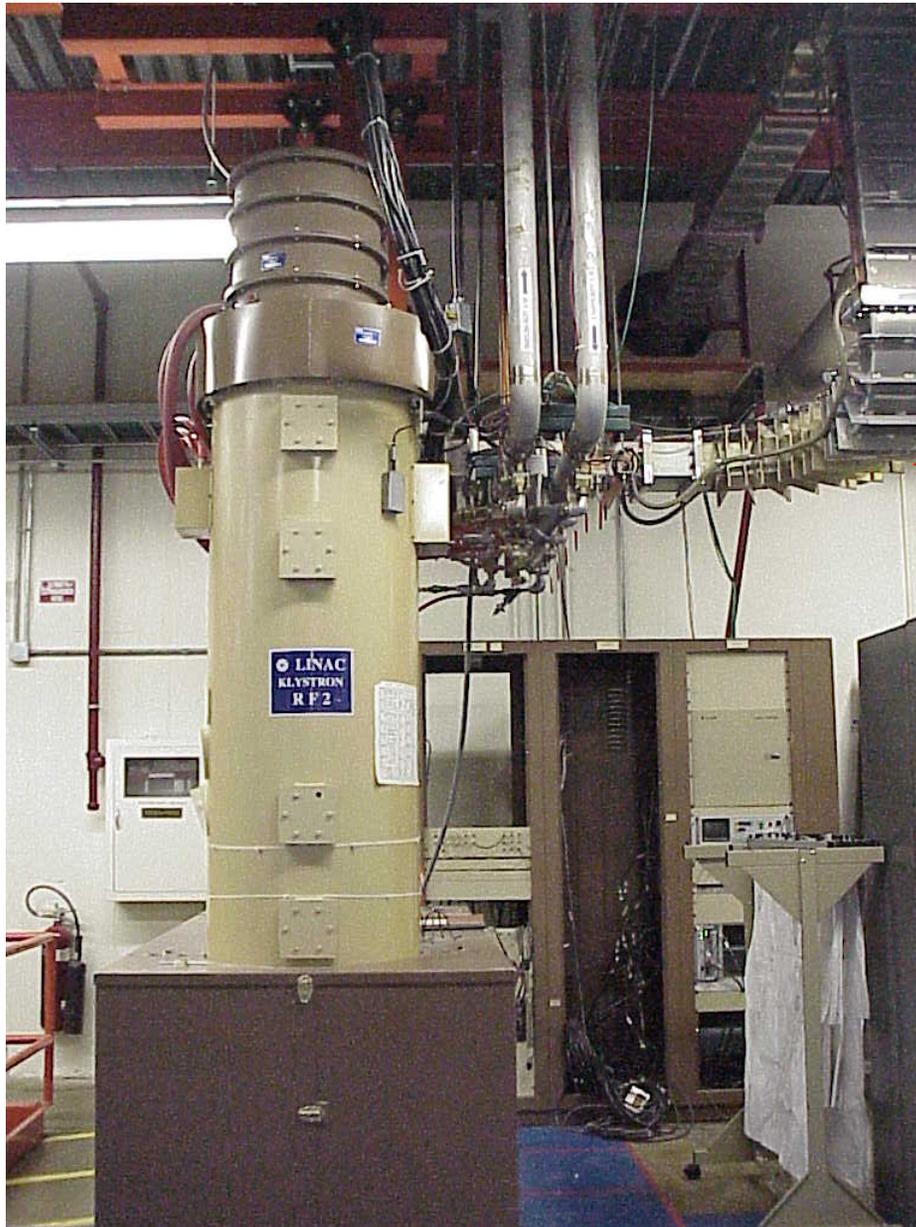

- Klystron in the linac gallery (well, the housing of a klystron ...)

Waveguide

- Like a very low loss cable for RF energy.
- Evacuated rectangular structures.
- Transverse dimensions fractions of a wavelength of RF ($\frac{1}{2}$, $\frac{1}{4}$ I forget which).

- Amount of power from klystron that gets into the cavity is called the **transmitted power**.
- Bunch extracts energy from the standing wave.
- What happens if you put power into a cavity but no bunch comes through?
 - Energy bounces around the cavity and comes back out the wave guide.
 - **Reflected power**.
 - Time scale for full discharge is seconds ($O(Q)$ periods).
 - Need to protect klystron from reflected power
 - Circulator directs reflected energy to a load.
- Bunch does not remove 100% of the energy so some always bounces back. (Check this?).
 - Modulator should be programmed to supply less energy if a small bunch is expected.
 - Or else input energy is just transported to dump. Wasteful.
 - Is this controlled by low level RF?
- If klystron frequency does not match cavity's, almost all power is reflected and only a little is stored in the cavity.

- What happens if you send an on axis beam down an unpowered cavity?
 - It creates a standing wave in the cavity (which runs out the waveguide if attached).
- What about an off axis beam?
 - Creates higher order modes (HOM) in the cavity.
 - Excites other patterns of standing waves at different frequencies.
 - Need to get rid of this energy by putting a second port on the cavity (at a location that does not disturb the primary standing wave much).
 - Connect a waveguide to this other port and send the higher order mode energy to a load.
 - Drum head example?
- Offaxis beam in powered cavity is the same.

- Can use the HOM port for diagnostics.
- ILC design has three ports:
 - Main power input port
 - 2 HOM ports.
- Can also check cavity performance with and without beam by measuring the reflected power.
- For the first few meters of the linac the electron speed is much less than c and special treatment is needed.

Dewars, Cryostats, Cryomodules


- Dewar:
 - Vessel with vacuum insulation (thermos bottle).
 - Contents is not under vacuum; vacuum is in the walls.
- Cryostat:
 - A device used to maintain constant low temperature.
 - Usually two layers of dewars: liquid nitrogen layer outside and liquid helium layer inside.
 - I guess ILC ones are like this (don't really know).
- Cryomodule:
 - 3 cavities (9+9+8) cells enclosed in a single cryostat.
 - 8 cell cavity also holds some magnets
 - Focusing, correcting??? Not sure.

RF Unit

- In ILC design 3 cryomodules are powered by a single klystron (plus its modulator and associated low level RF).
- Timing from one cavity to the next controlled by length of waveguide from the klystron (check?).
- Why 3 cryomodules per RF Unit?
 - Power limit of spec'd klystrons.
 - Commercial klystrons do not (yet) reach the specs for lifetime.

ILCTA @ Fermilab Phase 1: 1 RF Unit

Goal: S0, S1 and S2

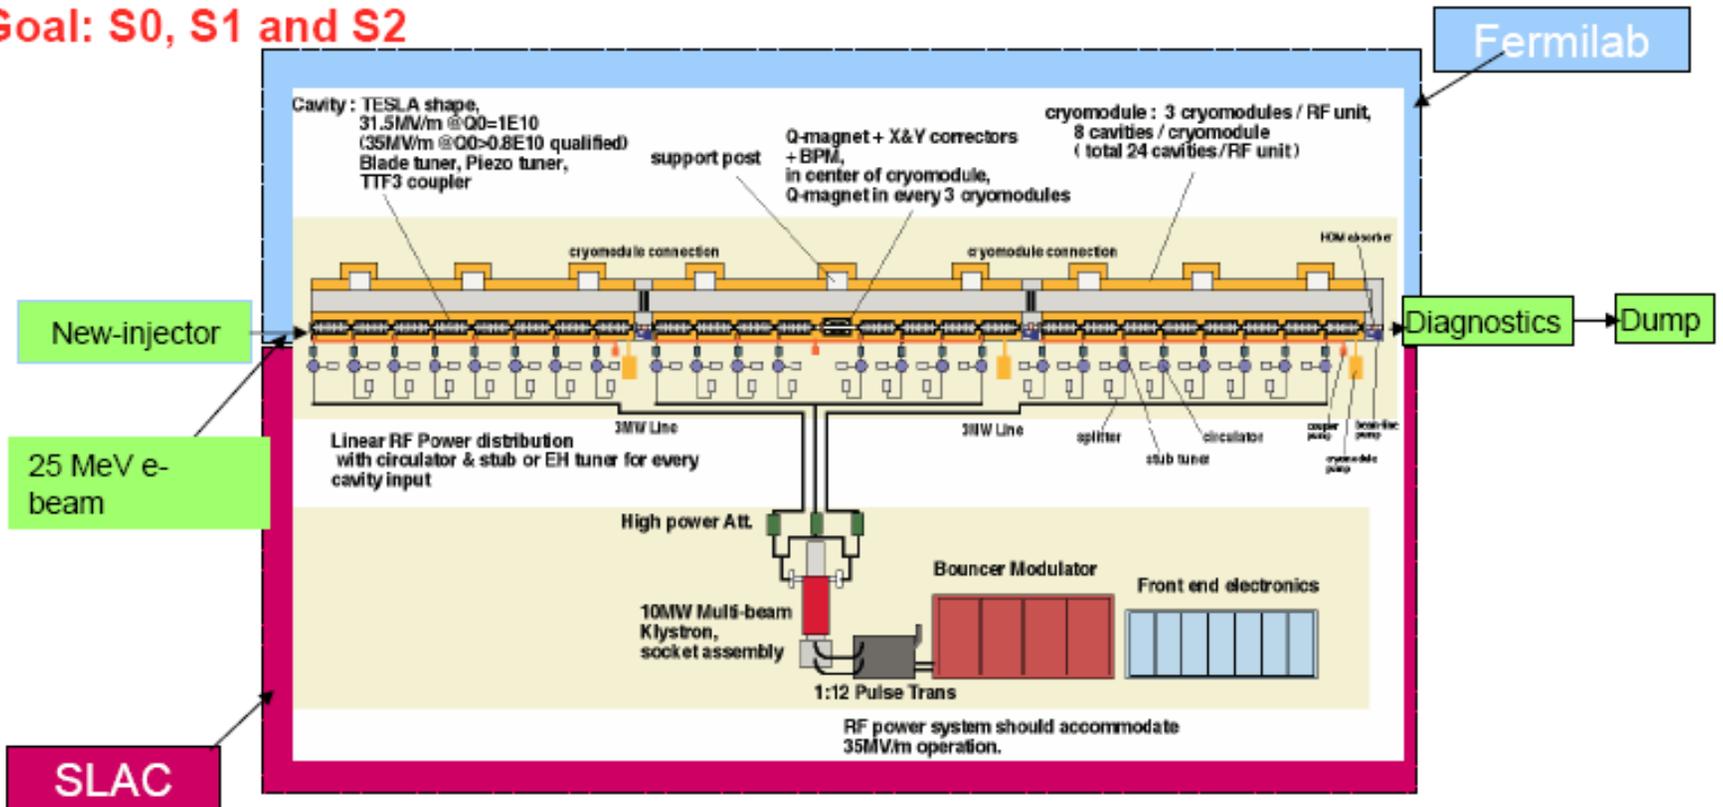

Components provided by US and International Collaborators

1st RF Unit Integrated by US Laboratories and Universities


2nd RF Unit Produced and Integrated by ILC laboratories, Universities and Industries

ILC LLRF, Control, Instrumentation, Feedback etc. ILC Institutions

Multipole expansion


- One can write an arbitrary magnetic field as a power series expansion with powers of $1/2^n$.
 - Dipole – two lobes in field pattern.
 - Quadrupole – 4 lobes in field pattern.
 - Octopole – 8 lobes
 - Hexdecapole – 16 lobes
 - ...
- Why no $n=0$ term or other odd terms?
 - Magnetic monopoles (magnetic analog of electric charges) have not been observed, even though we have looked very hard.

Dipole Magnet – Old Style

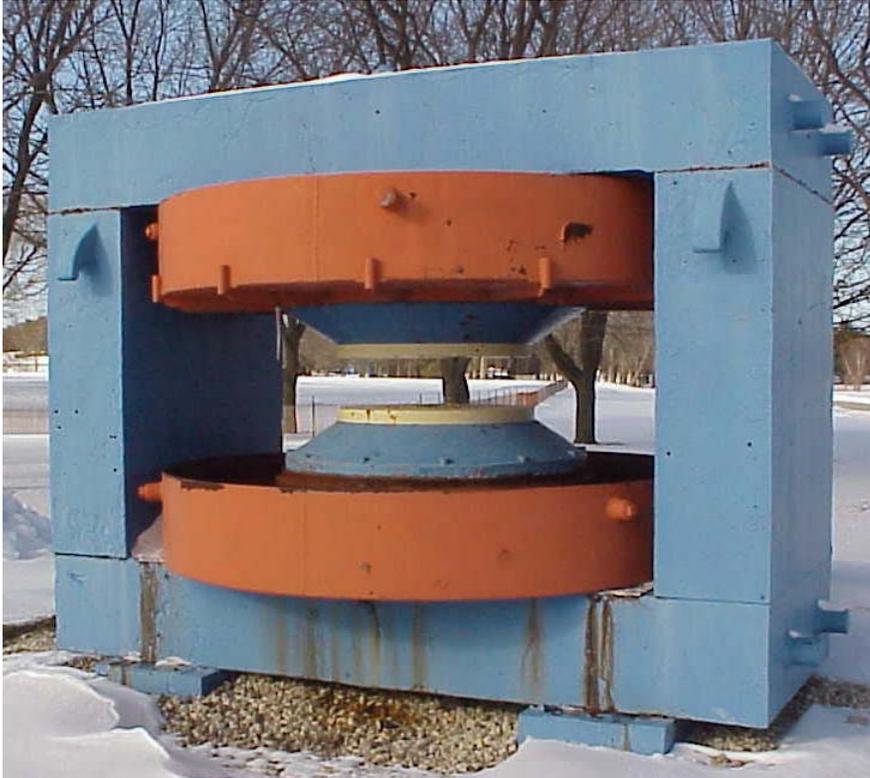

- Current carrying circular coils go into the orange housings.
- Current runs in same sense in upper and lower coil packages.
- This magnetizes the iron.
- Magnetic field is constant and vertical between the pole pieces.
 - Trajectory for a horizontal particle is (arc of) a circle.
- For TeV dipoles, distort pole shape to a racetrack.

Mockup of a TeV Dipole

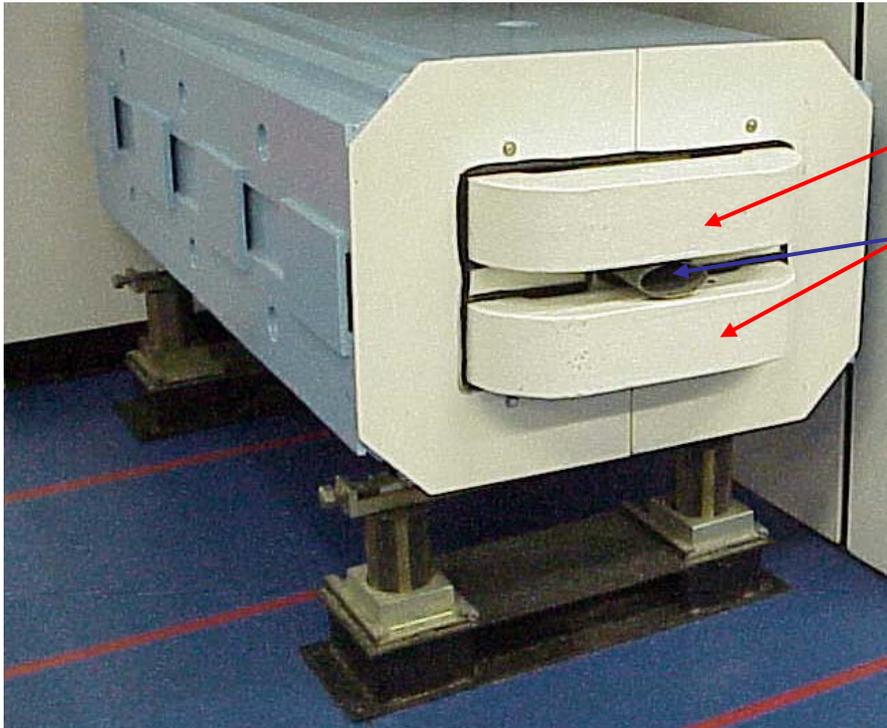

Coils: “racetrack” shape.

Beam Pipe

- On axis field is constant and vertical.
 - Edge effects – see later.
- Without iron pole tip, field is still constant and vertical but changes more rapidly off axis.
- Iron is useful up to about 1 T (check value).


Dipole Magnets

- TeV magnets have iron, like the old magnet shown a few pages back.
 - The shape of the field between the pole tips is governed by the shape of the iron.
 - Can be sloppier about coil construction.
- For fields over about 1 Tesla, iron saturates.
- To get stronger fields, just use coils without iron.
 - Tougher construction tolerances for coils.
 - To get really strong fields you need very high currents: use superconducting coils to keep losses low.


Quadrupole Magnets

- What happens if a particle is not traveling exactly along the cavity axis, or if the axes of all cavities are not perfectly lined up.
 - Particle starts to drift transversely.
- Focused back to the beam axis by quads.
 - Four current loops.
- Quads focus (FO) in x and defocus (DO) in y (or vice versa).
 - Or pick any pair of orthogonal transverse coords.
- If a FODO pair have the correct separation there is net focusing in both planes.
- During acceleration, the beam is only focused enough to keep it in the “sweet spot” of the machine.
 - At IP the beam is tightly focused.
- (Spot size times divergence) is conserved.

Tev CDF: Y vs X, 1 Sigma Beam Profile

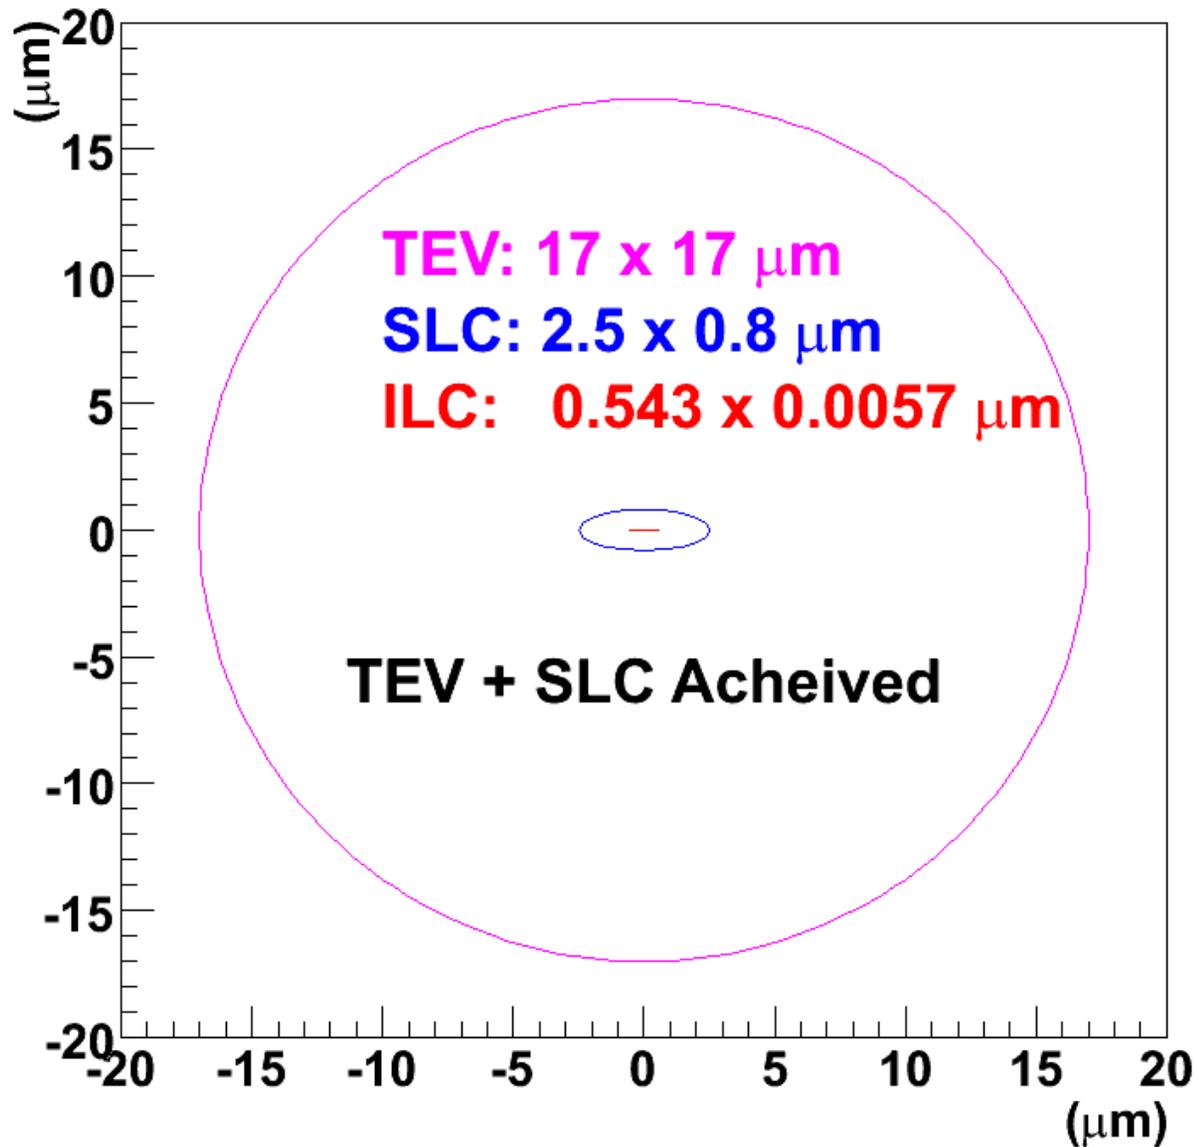

Tev CDF: Y vs Z, 1 Sigma Beam Profile

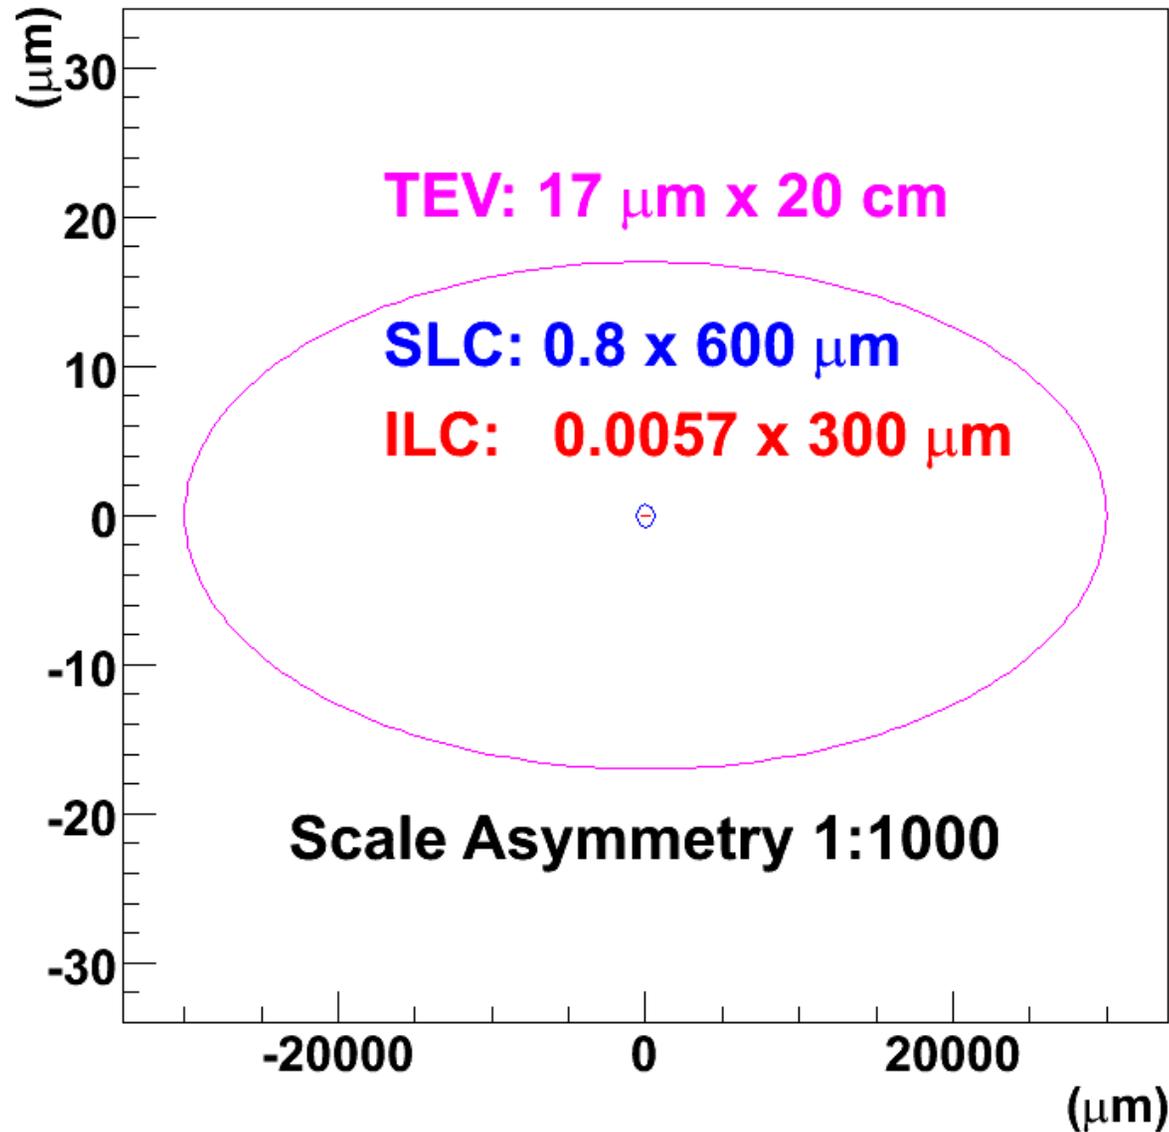

Corrector Magnets.

- Dipoles and quads have end effects, construction tolerances, materials defects ...
- These produce higher order multi-pole components.
- Need to have higher order magnets to correct for the errors induced by these effects:
 - Sextupole
 - Octopole
 - Hexadecapole
 - ...
- Positions of these magnets are fixed. To make the corrections, one varies the currents in them.


Kicker Magnet

- Magnet used to move particles from one trajectory to another. Example: injection or extraction into MI, TeV, Booster ...
 - All the ones I know of are dipoles.
- Magnet and associated power supply must have fast rise and fall times.
 - Do not want to disrupt leading and trailing bunches, just the one you want.
 - For ILC some very fast kickers are needed.
- Often the bore needs to be wider than a typical magnet to accommodate the two trajectories.

Making Positrons

- The ILC will accelerate bunch trains of about 1 ms in length, 5 times a second.
 - Duty cycle is about 1/200.
- During the off-cycle, electrons will be accelerated partway down the main linac and diverted to an **undulator**.
 - Static, period magnetic structure with very high magnetic field gradients.
 - This wiggles the beam to radiate forward going photons.
 - Then you steer the electrons out of the way.
- Put a sheet of high-Z material (Pb?) in the path of the photons: produces electron-positron pairs (plus junk).
- Keep the positrons and throw the rest away.
 - Do this with magnetic and electric fields.
 - The focus and cool the positrons.

RF Gun

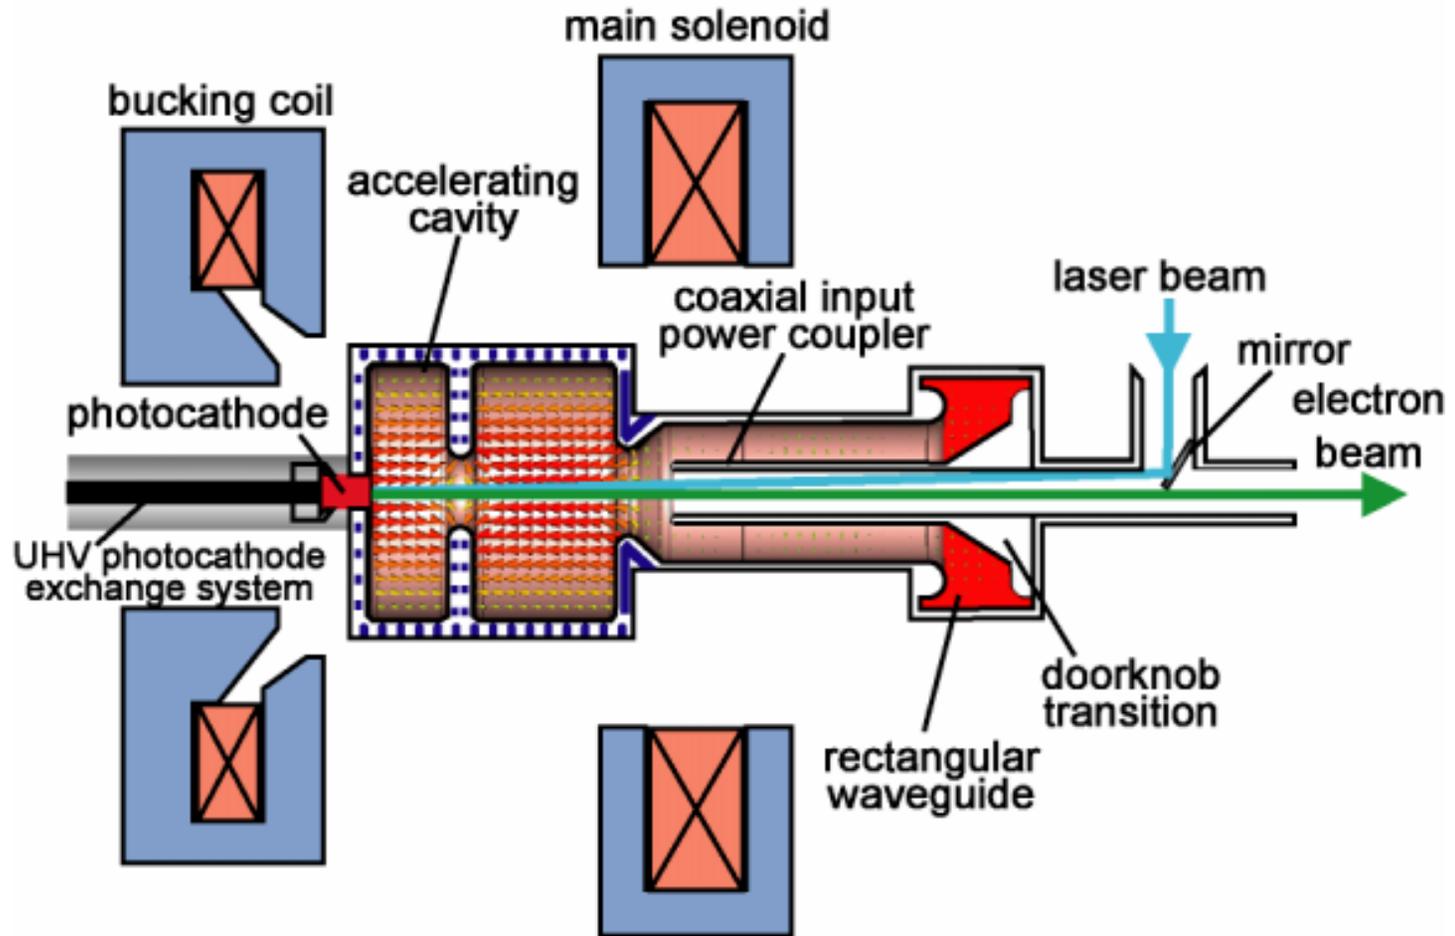

Still to come

- Faraday Cup
 - Metal, cup-shaped electrode.
 - Used to measure ion currents. Think of a closed electric circuit in which part of the path is not a wire but a stream of ions or electrons traveling in vacuum. The rest of the path is a more traditional electric circuit.
 - Not sure how it is used here. I guess it is used to measure the electron current somewhere in the RF gun.
- Dark Current.
- Magnetic Chicane bunch compressor.
- Superconducting.

The 3.9 GHz Cavities

- 3.9 GHz. The NML test accelerator contains some 3.9 GHz cavities that are used to bunch the beam more tightly.
 - Being developed as part of A0 project.
- We will make one set for us and another set to send to DESY who will use it in the same way at TTF.

Not Ready for Prime Time

IQ Plot

- Could mean a few things. This is my guess.
- Many observable things can be represented as a complex number.
 - An RF signal at a fixed frequency has a magnitude and phase.
- I and Q are just the real and imaginary parts of the complex number. (Sometimes the polar representation might be more useful).
- Language comes from the idea that you are measuring the amounts of some signal that are “In phase” and “in Quadrature” with a reference signal.
- Or it could refer to something totally different.

More Trivia

- When a pulse of energy comes down wave guide from klystron, it induces currents in the walls of the cavity.
- These currents repel and attract each other (known as Lorentz forces).
- These forces distort the cavity and change its resonant frequencies (tune).
- Piezoelectric actuators are present to pre-distort the cavity in the opposite direction so that the Lorentz force distorts the cavity back to the correct shape.